


EN1092-1 PN10 Type 05 Blind Flange

EN1092-1 PN10 TYPE 05 BLIND FLANGE DIMENSIONS AND TECHNICAL DRAWING

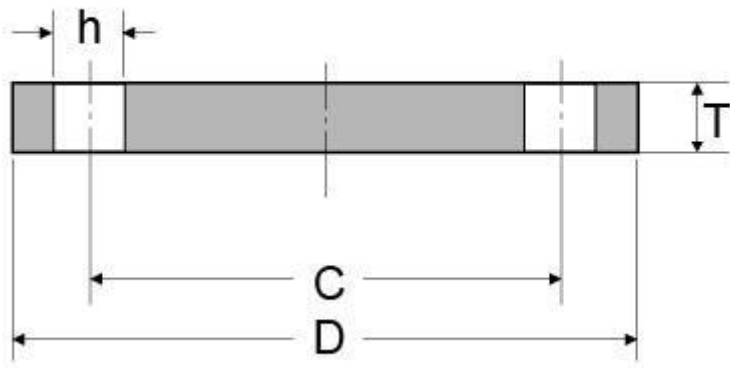

EN1092-1 PN10 TYPE 05 BLIND FLANGE DIMENSIONS DIMENSIONS AND WEIGHT

Rated Diameter	Flange Dimension			Screws Parameter			Weight Flange KG/PCS
	C	D	T	h	Thread	Bolt holes	
200	295	340	24	22	M20	8	16,500
250	350	395	26	22	M20	12	24,100
300	400	445	26	22	M20	12	30,800
350	460	505	26	22	M20	16	39,600
400	515	565	26	26	M24	16	49,400
450	565	615	28	26	M24	20	63,000
500	620	670	28	26	M24	20	75,200
600	725	780	34	30	M27	20	124,000
700	840	895	38	30	M27	24	183,000
800	950	1015	48	33	M30	24	297,000
900	1050	1115	50	33	M30	28	374,000
1000	1160	1230	54	36	M33	28	492,000
1200	1380	1455	66	39	M36	32	842,000

EN1092-1 PN10 TYPE 05 BLIND FLANGE INDUSTRIES AND APPLICATIONS

WIDELY USED IN THE INDUSTRIES

- Pumps, Valves, and vessels in manufacturing and food processing.
- Pipe connections in industrial waterworks.
- Heat exchangers and heating systems of all sizes.
- Mining support.
- Nuclear power systems.
- Plumbing and mechanical systems.
- Assemblies in the oil, gas, and petrochemical industries.
- Fire protection systems.

marcelforged.com