


10K SOP SOH BL Flange

JIS B2220 10K SOP SOH BL FLANGE DIMENSIONS, TECHNICAL DRAWINGS, AND APPROX. FLANGE WEIGHT

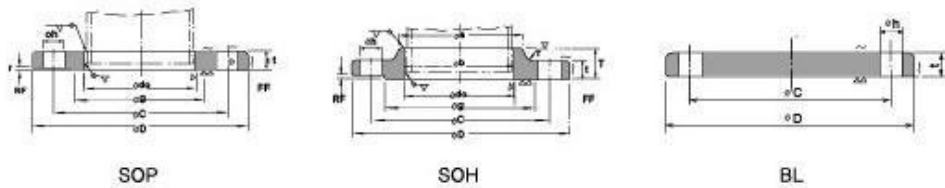

JIS B2220 10K SOP SOH BL FLANGE DIMENSIONS
DIMENSIONS AND APPROX. FLANGE WEIGHT

Nominal Dia. of Flange	Outside Dia. of Steel Pipe	Inside Dia. of Flange do	Outside Dia. of Flange D	Sectional Dimensions of Flange						Bolt Hole		
				t	T	Dia. of Hub a b		r	Dia. of Face f	Dia. of Raised Face g	Bolt. Circle Dia	Num of Bo Holes
10	17.3	17.8	90.0	12	—	—	—	—	1	46	65	4
15	21.7	22.2	95.0	12	—	—	—	—	1	51	70	4
20	27.2	27.7	100.0	14	—	—	—	—	1	56	75	4
25	34.0	34.5	125.0	14	—	—	—	—	1	67	90	4

32	42.7	43.2	135.0	16	-	-	-	-	2	76	100	4
40	48.6	49.1	140.0	16	-	-	-	-	2	81	105	4
50	60.5	61.1	155.0	16	-	-	-	-	2	96	120	4
65	76.3	77.1	175.0	18	-	-	-	-	2	116	140	4
80	89.1	90.0	185.0	18	-	-	-	-	2	126	150	8
(90)	101.6	102.6	195.0	18	-	-	-	-	2	136	160	8
100	114.3	115.4	210.0	18	-	-	-	-	2	151	175	8
125	139.6	141.2	250.0	20	-	-	-	-	2	182	210	8
150	165.2	166.6	280.0	22	-	-	-	-	2	212	240	8
(175)	190.7	192.1	305.0	22	-	-	-	-	2	237	265	12
200	216.3	218.0	330.0	22	-	-	-	-	2	262	290	12
(225)	241.8	243.7	350.0	22	-	-	-	-	2	282	310	12
250	267.4	269.5	400.0	24	36	288	292	6	2	324	355	12
300	318.5	321.0	445.0	24	38	340	346	6	3	368	400	16
350	355.6	358.1	490.0	26	42	380	386	6	3	413	445	16
400	406.4	409.0	560.0	28	44	436	442	6	3	475	510	16
450	457.2	460.0	620.0	30	48	496	502	6	3	530	565	20
500	508.0	511.0	675.0	30	48	548	554	6	3	585	620	20
(550)	558.8	562.0	745.0	32(34)	52	604	610	6	3	640	680	20
600	609.6	613.0	795.0	32(36)	52	656	662	6	3	690	730	24
(650)	660.4	664.0	845.0	34(38)	56	706	712	6	3	740	780	24
700	711.2	715.0	905.0	34(40)	58	762	770	6	3	800	840	24
(750)	762.0	766.0	970.0	36(44)	62	816	824	6	3	855	900	24
800	812.8	817.0	1020.0	36(46)	64	868	876	6	3	905	950	28
(850)	863.6	868.0	1070.0	36(48)	66	920	928	6	3	955	1000	28
900	914.4	919.0	1120.0	38(50)	70	971	979	6	3	1005	1050	28
1000	1016.0	1021.0	1235.0	40(56)	74	1073	1081	6	3	1110	1160	28
1100	1117.6	1122.0	1345.0	42(62)	95	1175	1185	8	3	1220	1270	28
1200	1219.2	1224.0	1465.0	44(66)	101	1278	1290	8	3	1325	1380	32
1350	1371.6	1376.0	1630.0	48(74)	110	1432	1450	8	3	1480	1540	36
1500	1524.0	1529.0	1795.0	50(82)	123	1585	1605	8	3	1635	1700	40

- Flanges of parenthesized nominal diameter had better not be used.
 - SOP 10A-1500A
 - SOH 250A-1500A
- BL 10-1500