


16K SOH BL Flange

JIS B2220 16K SOH BL FLANGE DIMENSIONS, TECHNICAL DRAWINGS, AND APPROX. FLANGE WEIGHT

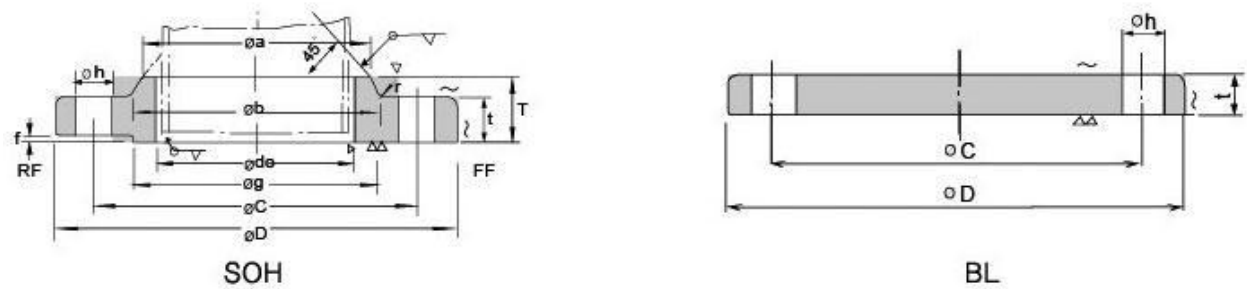

JIS B2220 16K SOH BL FLANGE DIMENSIONS

DIMENSIONS AND APPROX. FLANGE WEIGHT

Nominal Dia. of Flange	Outside Dia. of Steel Pipe	Inside Dia. of Flange do	Outside Dia. of Flange D	Sectional Dimensions of Flange							Bolt Hole	
				t	T	Dia. of Hub		r	Dia. of Face f	Dia. of Raised Face g	Bolt. Circle Dia	Number of Bolt Holes
						a	b					
10	17.3	17.8	90	12	16	26	28	4	1	46	65	4
15	21.7	22.2	95	12	16	30	32	4	1	51	70	4
20	27.2	27.7	100	14	20	38	42	4	1	56	75	4
25	34	34.5	125	14	20	46	50	4	1	67	90	4
32	42.7	43.2	135	16	22	56	60	5	2	76	100	4
40	48.6	49.1	140	16	24	62	66	5	2	81	105	4

50	60.5	61.1	155	16	24	76	80	5	2	96	120	8
65	76.3	77.1	175	18	26	94	98	5	2	116	140	8
80	89.1	90	200	20	28	108	112	6	2	132	160	8
-90	101.6	102.6	210	20	30	120	124	6	2	145	170	8
100	114.3	115.4	225	22	34	134	138	6	2	160	185	8
125	139.8	141.2	270	22	34	164	170	6	2	195	225	8
150	165.2	166.6	305	24	38	196	202	6	2	230	260	12
200	216.3	218	350	26	40	244	252	6	2	275	305	12
250	267.4	269.5	430	28	44	304	312	6	2	345	380	12
300	318.5	321	480	30	48	354	364	8	3	395	430	16
350	355.6	358.1	540	34	52	398	408	8	3	440	480	16
400	406.4	409	605	38	60	446	456	10	3	495	540	16
450	457.2	460	675	40	64	504	514	10	3	560	605	20
500	508	511	730	42	68	558	568	10	3	615	660	20
-550	558.8	562	795	44	70	612	622	10	3	670	720	20
600	609.6	613	845	46	74	666	676	10	3	720	770	24
650	660.4	664	895	48	77	704	726	10	5	770	820	24
700	711.2	715	960	50	80	754	776	10	5	820	875	24
750	762	766	1020	52	83	806	832	10	5	880	935	24
800	812.8	817	1085	54	86	865	885	10	5	930	990	24
850	863.6	868	1135	56	89	916	936	10	5	980	1040	24
900	914.4	919	1185	58	93	968	986	10	5	1030	1090	28
1000	1016	1021	1320	62	99	1070	1098	12	5	1140	1210	28
1100	1117.6	1123	1420	66	105	1180	1200	12	15	1240	1310	32
1200	1219.2	1225	1530	70	112	1282	1302	12	5	1350	1420	32
1300	1320.8	1326	1645	74	-	-	-	-	5	1450	1530	32
1350	1371.6	1377	1700	76	-	-	-	-	5	1510	1590	32
1400	1422.4	1428	1755	78	-	-	-	-	5	1560	1640	36
1500	1524	1529	1865	80	-	-	-	-	5	1670	1750	36

- Flanges of parenthesized nominal diameter had better not be used.
- SOH 10-600.
BL 10-1600.