


5K SOP SOH BL Flange

JIS B2220 5K SOP SOH BL FLANGE DIMENSIONS, TECHNICAL DRAWINGS, AND APPROX. FLANGE WEIGHT

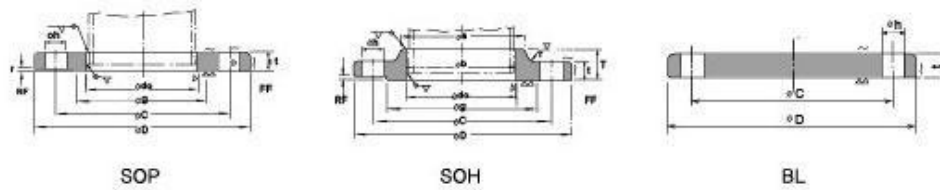

JIS B2220 5K SOP SOH BL FLANGE DIMENSIONS

DIMENSIONS AND APPROX. FLANGE WEIGHT

Nominal Dia. of Flange	Outside Dia. of Steel Pipe	Inside Dia. of Flange do	Outside Dia. of Flange D	Sectional Dimensions of Flange						Bolt Hole		
				t	T	Dia. of Hub		r	Dia. of Face f	Dia. of Raised Face g	Bolt. Circle Dia	Numb of Bol Holes
						a	b					
10	17.3	17.8	75.0	9	-	-	-	-	1	39	55	4
15	21.7	22.2	80.0	9	-	-	-	-	1	44	60	4
20	27.2	27.7	85.0	10	-	-	-	-	1	49	65	4
25	34.0	34.5	95.0	10	-	-	-	-	1	59	75	4
32	42.7	43.2	115.0	12	-	-	-	-	2	70	90	4
40	48.6	49.1	120.0	12	-	-	-	-	2	75	95	4

50	60.5	61.1	130.0	14	-	-	-	-	2	85	105	4
65	76.3	77.1	155.0	14	-	-	-	-	2	110	130	4
80	89.1	90.0	180.0	14	-	-	-	-	2	121	145	4
(90)	101.6	102.6	190.0	14	-	-	-	-	2	131	155	4
100	114.3	115.4	200.0	16	-	-	-	-	2	141	165	8
125	139.6	141.2	235.0	16	-	-	-	-	2	176	200	8
150	165.2	166.6	265.0	18	-	-	-	-	2	206	230	8
(175)	190.7	192.1	300.0	18	-	-	-	-	2	232	260	8
200	216.3	218.0	320.0	20	-	-	-	-	2	252	280	8
(225)	241.8	243.7	345.0	20	-	-	-	-	2	277	305	12
250	267.4	269.5	385.0	22	-	-	-	-	2	317	345	12
300	318.5	321.0	430.0	22	-	-	-	-	3	360	390	12
350	355.6	358.1	480.0	24	-	-	-	-	3	403	435	12
400	406.4	409.0	540.0	24	-	-	-	-	3	463	495	16
450	457.2	460.0	605.0	24	40	495	500	5	3	523	555	16
500	508.0	511.0	655.0	24	40	546	552	5	3	573	605	20
(550)	558.8	562.0	720.0	26	42	597	603	5	3	630	665	20
600	609.6	613.0	770.0	26	44	648	654	5	3	680	715	20
(650)	660.4	664.0	825.0	26(28)	48	702	708	5	3	735	770	24
700	711.2	715.0	875.0	26(30)	48	751	758	5	3	785	820	24
(750)	762.0	766.0	945.0	28(32)	52	802	810	5	3	840	880	24
800	812.8	817.0	995.0	28(34)	52	854	862	5	3	890	930	24
(850)	863.6	868.0	1045.0	28(36)	54	904	912	5	3	940	980	24
900	914.4	919.0	1095.0	30(36)	56	956	964	5	3	990	1030	24
1000	1016.0	1021.0	1195.0	32(40)	60	1058	1066	5	3	1090	1130	28
1100	1117.6	1122.0	1305.0	32(44)	71	1158	1170	7	3	1200	1240	28
1200	1219.2	1224.0	1420.0	34(48)	77	1260	1272	7	3	1305	1350	32
1350	1371.6	1376.0	1575.0	34(48)	80	1414	1426	7	3	1460	1505	32
1500	1524.0	1529.0	1730.0	36(58)	86	1568	1580	7	3	1615	1660	36

- Flanges of parenthesized nominal diameter had better not be used.
- In case of nominal diameter 650-1500,Blank fange(BL) is conform to parenthesized thickness
- SOP 10A-1500A
- SOH 450A-1500A
- BL 10-1500