


UNI 6093 PN16 Blind Flange

UNI 6093 PN16 BLIND FLANGE DIMENSIONS AND TECHNICAL DRAWING

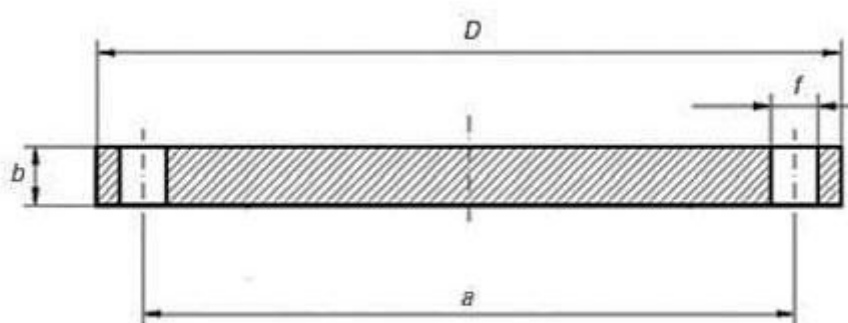

UNI 6093 PN16 BLIND FLANGE DIMENSIONS AND WEIGHT

UNI 6093 Pn16 Blind Flange Dimensions							
Rated Dia.	a	b	D	f	No. of holes	Thread of the screws	Weight in Kilogram
15	65	14	95	14	4	M 12	0,71
20	75	16	105	14	4	M 12	1,01
25	85	16	115	14	4	M 12	1,22
32	100	16	140	18	4	M 16	1,80
40	110	16	150	18	4	M 16	2,09
50	125	18	165	18	4	M 16	2,87
65	145	18	185	18	4	M 16	3,65

80	160	20	200	18	8**	M 16	4,61
100	180	20	220	18	8	M 16	5,65
125	210	22	250	18	8	M 16	8,12
150	240	22	285	22	8	M 20	10,5
175	270	24	315	22	8	M 20	14,1
200	295	24	340	22	12	M 20	16,2
250	355	26	405	25	12	M 22	25,1
300	410	28	460	25	12	M 22	35,2
350	470	30	520	25	16	M 22	48,2
400	525	32	580	30	16	M 27	63,5
450	585	32	640	30	20	M 27	77,2
500	650	34	715	33	20	M 30	102

UNI 6093 PN16 BLIND FLANGE INDUSTRIES AND APPLICATIONS

WIDELY USED IN THE INDUSTRIES

- Pumps, Valves, and vessels in manufacturing and food processing.
- Pipe connections in industrial waterworks.
- Heat exchangers and heating systems of all sizes.
- Mining support.
- Nuclear power systems.
- Plumbing and mechanical systems.
- Assemblies in the oil, gas, and petrochemical industries.
- Fire protection systems.